


Hot Well Exposed Element Steam Table

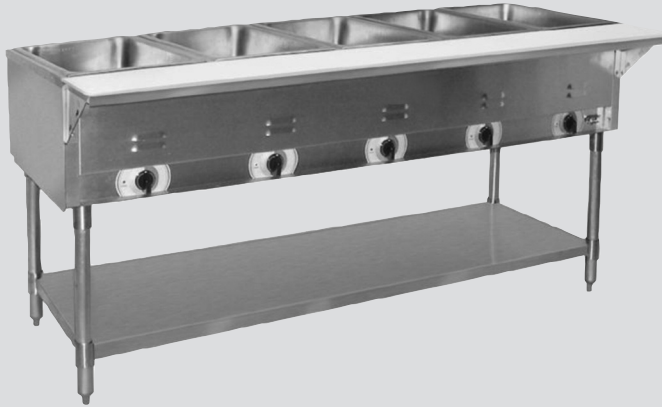

Models

Stationary:	Portable:
ST-2-AF	PST-2-AF
ST-3-AF	PST-3-AF
ST-4-AF	PST-4-AF
ST-5-AF	PST-5-AF

OPTIONAL FEATURES

Cutting Boards:
NSF approved Plastic Cutting
Boards – 8" x ½"
Hardwood – 8" x 1-¼"
Richlite Heat-Resistant – 8" x ½"

- Serving Shelves with Glass Protector
- Plate Shelves
- Tubular Tray Slide – 3-Bar
- Buffet Shelves
- Spillage Pans
- Adjustable Overall Shelf System
- Pot Hooks
- Deluxe Serving Shelves
- Solid Tray Slide
- Rolltop Covers
- Adapter Bars for Food Pans – 10" x 12"
- Adapter Tops for Round Inserts – 4-, 7-, and 11-Quart
- Auto Fill



PRODUCT INFORMATION

■ **Design & Construction:** Compact Design with High Output. All stainless steel wrapper.

Features include:

- Individual controls for peak performance.
- High-output tubular heating elements.
- UL and UL Sanitation approved.
- Adaptable for wet applications.

Hot Well Exposed Element Steam Table

ST-AF 120V/240V, PST-AF 120/240V

Also available in 208V. When Ordering replace the 240 with 208. Example: ST-208-3-AF.

TECHNICAL SPECIFICATIONS FOR STATIONARY MODELS

Non-Marking feet adjust unit height from 34-½" to 35"

Model Number	# of top openings	Length	Weight	Electrical data
ST-120-2-AF	2	30-5/8"	97 lbs.	1000W, 120V, 1 Phase, 8.33A, NEMA 5-15P
ST-240-2-AF	2	30-5/8"	97 lbs.	1500W, 240V, 1 Phase, 6.25A, NEMA 6-20P
ST-120-3-AF	3	44-5/8"	125 lbs.	1500W, 120V, 1 Phase, 12.5A, NEMA 5-15P
ST-240-3-AF	3	44-5/8"	125 lbs.	2250W, 240V, 1 Phase, 9.38A, NEMA 6-20P
ST-120-4-AF	4	58-5/8"	158 lbs.	2000W, 120V, 1 Phase, 16.67A, NEMA 5-30P
ST-240-4-AF	4	58-5/8"	158 lbs.	3000W, 240V, 1 Phase, 12.5A, NEMA 6-20P
ST-120-5-AF	5	72-5/8"	193 lbs.	2500W, 120V, 1 Phase, 20.83A, NEMA 5-30P
ST-240-5-AF	5	72-5/8"	193 lbs.	3750W, 240V, 1 Phase, 15.63A, NEMA 6-30P

Note: 208V 3 Phase available, consult factory

Model in the chart indicate units with galvanized legs and aluminized under shelf. To order units with stainless steel legs and under shelf insert an S after the well number. Example ST-120-3S-AF.

TECHNICAL SPECIFICATIONS FOR PORTABLE MODELS

Push handle and 4" – diameter casters, two with brake included

Model Number	# of top openings	Length	Weight	Electrical data
PST-120-2-AF	2	30-5/8"	101 lbs.	1000W, 120V, 1 Phase, 8.33A, NEMA 5-15P
PST-240-2-AF	2	30-5/8"	101 lbs.	1500W, 240V, 1 Phase, 6.25A, NEMA 6-20P
PST-120-3-AF	3	44-5/8"	129 lbs.	1500W, 120V, 1 Phase, 12.5A, NEMA 5-15P
PST-240-3-AF	3	44-5/8"	129 lbs.	2250W, 240V, 1 Phase, 9.38A, NEMA 6-20P
PST-120-4-AF	4	58-5/8"	162 lbs.	2000W, 120V, 1 Phase, 16.67A, NEMA 5-30P
PST-240-4-AF	4	58-5/8"	162 lbs.	3000W, 240V, 1 Phase, 12.5A, NEMA 6-20P
PST-120-5-AF	5	72-5/8"	199 lbs.	2500W, 120V, 1 Phase, 20.83A, NEMA 5-30P
PST-240-5-AF	5	72-5/8"	199 lbs.	3750W, 240V, 1 Phase, 15.63A, NEMA 6-30P

Note: 208V 3 Phase available, consult factory



Savannah, TN 38372 www.americanfoodserviceco.com
731-925-2200 / 800-447-4693 / FAX 731-925-2840

Due to continued product improvement, specifications are subject to change without notice.

8/1/11 USA