


Hot Well Steam Table Sealed Well

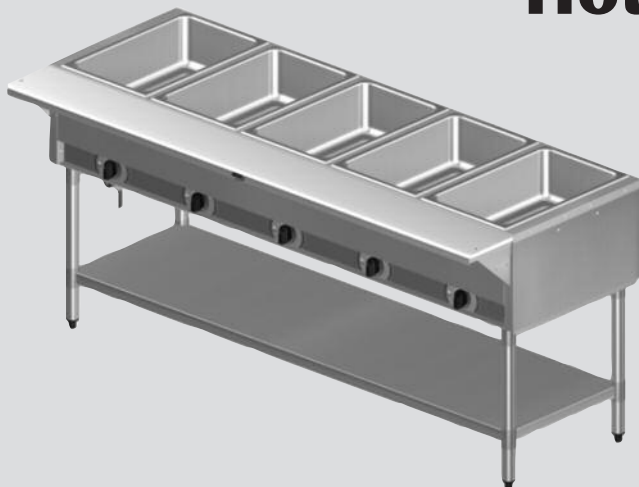

Models

Stationary:	Portable:
SST-2-AF	PSST-2-AF
SST-3-AF	PSST-3-AF
SST-4-AF	PSST-4-AF
SST-5-AF	PSST-5-AF

OPTIONAL FEATURES

Cutting Boards:
NSF approved Plastic Cutting
Boards – 8" x 1/2"
Hardwood – 8" x 1-1/4"
Richlite Heat-Resistant – 8" x 1/2"

- Serving Shelves with Glass Protector
- Plate Shelves
- Tubular Tray Slide – 3-Bar
- Buffet Shelves
- Adjustable Overall Shelf System
- Pot Hooks
- Deluxe Serving Shelves
- Solid Tray Slide
- Rolltop Covers
- Adapter Bars for Food Pans – 10" x 12"
- Adapter Tops for Round Inserts – 4-, 7-, and 11-Quart
- Auto Fill



PRODUCT INFORMATION

- **Design & Construction:** Individual sealed wells are fully coved and constructed of stainless steel.
 - Individual infinite switch heat controls; thermostatic also available
 - Indicator light remains on while control is in ON position
 - Standard with 750 watt elements; 1200 and 1600 watt elements are available
 - Deep drawn stainless steel well
 - Fully welded drain
 - Copper manifold with gate valve is standard
 - 1/2" thick poly cutting board mounted on stainless steel shelf supported by stainless steel brackets
 - Available with either stainless steel legs and under shelf or coated steel legs and under shelf
 - Cord and plug included with standard units
- **Design Features:** Heavy gauge stainless steel construction for the body. Individual controls allow for wet or dry application.

Features include:

- High-output tubular heating elements.
- Stationary and portable units available.
- UL and UL Sanitation approved.
- Full range of options and accessories.
- All wells complete with drains running to a common all-copper manifold complete with ball valve.

Hot Well Steam Table — Sealed Well

Stationary: SST-2-AF, SST-3-AF, SST-4-AF, SST-5-AF

Portable: PSST-2-AF, PSST-3-AF, PSST-4-AF, PSST-5-AF

For AutoFill® Automatic Water System add “A” to the front of the model number. Example: ASST-120-2-AF.

TECHNICAL SPECIFICATIONS FOR STATIONARY MODELS

Non-Marking feet adjust unit height from 34-½" to 35"

Model Number	# of top openings	Length	Weight	Electrical data
SST-120-2-AF	2	31-3/8"	101 lbs.	1500W, 120V, 1 Phase, 12.5A, NEMA 5-15P
SST-240-2-AF	2	31-3/8"	101 lbs.	1500W, 240V, 1 Phase, 6.25A, NEMA 6-20P
SST-120-3-AF	3	45-3/4"	129 lbs.	2250W, 120V, 1 Phase, 18.8A, NEMA 5-30P
SST-240-3-AF	3	45-3/4"	129 lbs.	2250W, 240V, 1 Phase, 9.38A, NEMA 6-20P
SST-120-4-AF	4	60-1/8"	162 lbs.	3000W, 120V, 1 Phase, 25.0A, NEMA 5-50P
SST-240-4-AF	4	60-1/8"	162 lbs.	3000W, 240V, 1 Phase, 12.5A, NEMA 6-20P
SST-120-5-AF	5	74-1/2"	199 lbs.	3750W, 120V, 1 Phase, 31.3A, NEMA 5-50P
SST-240-5-AF	5	74-1/2"	199 lbs.	3750W, 240V, 1 Phase, 15.63A, NEMA 6-30P

Note: 208V 3 Phase available, consult factory

TECHNICAL SPECIFICATIONS FOR PORTABLE MODELS

Push handle and 4" – diameter casters, two with brake included

Model Number	# of top openings	Length	Weight	Electrical data
PSST-120-2-AF	2	31-3/8"	101 lbs.	1500W, 120V, 1 Phase, 12.5A, NEMA 5-15P
PSST-240-2-AF	2	31-3/8"	101 lbs.	1500W, 240V, 1 Phase, 6.25A, NEMA 6-20P
PSST-120-3-AF	3	45-3/4"	129 lbs.	2250W, 120V, 1 Phase, 18.8A, NEMA 5-30P
PSST-240-3-AF	3	45-3/4"	129 lbs.	2250W, 240V, 1 Phase, 9.38A, NEMA 6-20P
PSST-120-4-AF	4	60-1/8"	162 lbs.	3000W, 120V, 1 Phase, 25.0A, NEMA 5-50P
PSST-240-4-AF	4	60-1/8"	162 lbs.	3000W, 240V, 1 Phase, 12.5A, NEMA 6-20P
PSST-120-5-AF	5	74-1/2"	199 lbs.	3750W, 120V, 1 Phase, 31.3A, NEMA 5-50P
PSST-240-5-AF	5	74-1/2"	199 lbs.	3750W, 240V, 1 Phase, 15.63A, NEMA 6-30P

Note: 208V 3 Phase available, consult factory

