

Air Supply™ Trayline Refrigerator

Models

- 34-340-AF (glass door)
- 34-341-AF (stainless door)

The Trayline Refrigerator is designed to allow door-open use during serving time. The Thermal glass door is standard and the bottom-mounted compressor provides stability. This unit is designed with a horizontal flow of air across the front of the cabinet interior to reduce the exchange of outside air with inside air during operation with the door open.

FEATURES


- Compressor is bottom mounted, providing a lower center of gravity for more stability.
- Digital thermometer and on-off switch are mounted inside cabinet and are visible with glass door closed or open.
- Removable stainless steel pan slides with no-tip feature accommodate (12) 18" x 26" pans on 3" centers.
- Servicing is made easy with self-contained air circulating fans and plasticized fin coil located in top section of interior cabinet.
- Optional correctional package available.

PRODUCT INFORMATION

- Air Supply™ Trayline Refrigerator exterior body is constructed of 20 gauge, stainless steel; formed and welded to form a smooth one-piece unit, with bottom of unit housing refrigeration compressor.
- Pan slides are removable 16 gauge stainless steel with no-tip feature and accommodate (12) 18"x26" pans on 3" centers.
- Cabinet has air ducts on the left and right side of the interior to ensure proper air flow. Internal tumble airflow helps keep out warm room temps, even with door open.
- Non-marking corner bumpers are standard.
- Unit is furnished with 5" heavy duty swivel plate casters with neoprene tread, two in front with locking brakes.

Air Supply™ Trayline Refrigerator

34-340-AF, 34-341-AF

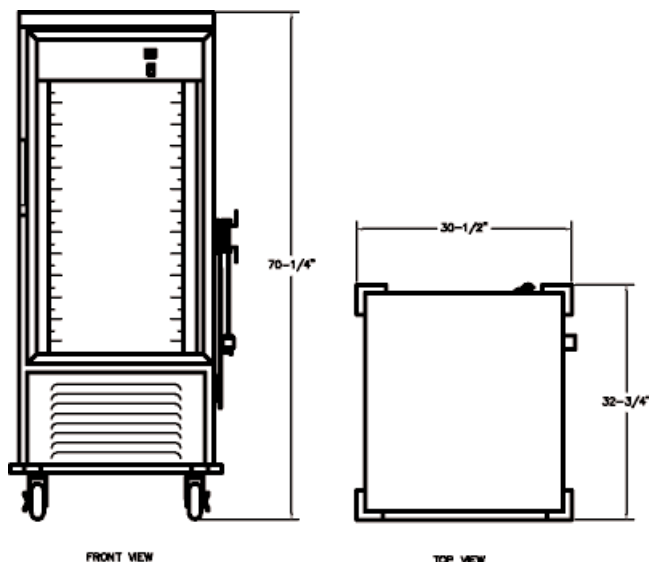

ELECTRICAL

115/60/1

TECHNICAL SPECIFICATIONS

Model	Dimensions			Shipping Weight	Electrical	Capacity
	W	D	H			
34-340-AF	30½"	32¾"	70¼"	525 lbs.	115V / 60 / 1ph	12 - 18x26
34-341-AF	30½"	32¾"	70¼"	525 lbs.	115V / 60 / 1ph	12 - 18x26

BID SPECIFICATIONS

Provide (1) model _____ Air Supply™ Trayline Refrigerator.

Shall be double wall construction with foamed in-place insulation, double pane, tempered glass door, with 270° opening, removable, no tip tray guides, air curtain and heated breaker strips.

Compressor shall be ½ HP, 115 volt, 1 phase.

Provide with (4) 5" heavy duty, swivel plate casters, (2) locking, heavy neoprene wheels.

OPTIONAL ACCESSORIES

- Perimeter bumper
- Push handle with donut bumpers
- Locking door handle
- Optional correctional package available



Savannah, TN 38372 www.americanfoodserviceco.com
731-925-2200 / 800-447-4693 / FAX 731-925-2840

Due to continued product improvement, specifications are subject to change without notice.

2/01/11 USA