



35-XXA-AF

Bandveyor™ Powered Tray Conveyor

Models

□ 35-XXA-AF

XX= total length
of conveyor

The Series 35 powered tray conveyors are designed for heavy duty use in institutions. They provide cost savings over conventional powered conveyors due to low maintenance cost.

FEATURES


- Heavy duty stainless steel construction throughout.
- Electronic, low maintenance variable speed drive.
- Moving bands are of FDA approved material requiring no alignment or slack adjustments.
- All bearings are lubricated for life and sealed.
- Electrical outlets in lower raceway provide power on either side of the tray line.
- Bands are cleanable using a hand-held cloth.
- Significant cost savings over conventional powered conveyors.
- All seams are continuously welded and polished.
- Integrated loading and unloading surfaces are designed for ease of tray assembly and inspection.
- Optional starter station available.
- Optional correctional package available.

PRODUCT INFORMATION

- **Construction:** Two full-length load-bearing channels formed of 12 gauge aluminized steel shall be positioned beneath the top deck to give maximum strength and rigidity. The top deck shall be one piece 18-gauge stainless steel fabricated to cover support channels on exterior and interior sides and both ends. All seams shall be continuously welded and polished. Top deck shall be provided with continuous "V" type marine edge and shall accommodate trays up to 17¾" wide. A 20" loading and a 28" unloading shelf shall be integral with top deck.
 - **Conveyor Bands:** Trays shall be conveyed on four continuous bands of FDA approved material. Bands shall require no adjustments for alignment or slack takeup.
 - **Legs:** Leg stands shall be 1½" O.D. stainless steel with 1¼" braces equipped with adjustable leveling bullet feet.
 - **Electrical:** Construction shall be such that a separate, stainless steel, drip-proof wire way is located below the conveyor top deck. Electrical outlets shall be mounted in the raceway and shall be furnished with waterproof covers. A circuit breaker panel shall be furnished located at one end of the wire way with a separate breaker for each outlet.
- Note:** Customer should advise total number and location of electrical outlets required, voltage and wattage (or amperage) indicated for each. Customer should also indicate preferred location for optional circuit breaker panel if specified. No cord set will be provided unless specified. Customer should also advise manufacturer and model number of cord caps to be connected to conveyor electrical outlets.

Bandveyor™ Powered Tray Conveyor

35-XXA-AF (XX=Total length of conveyor)

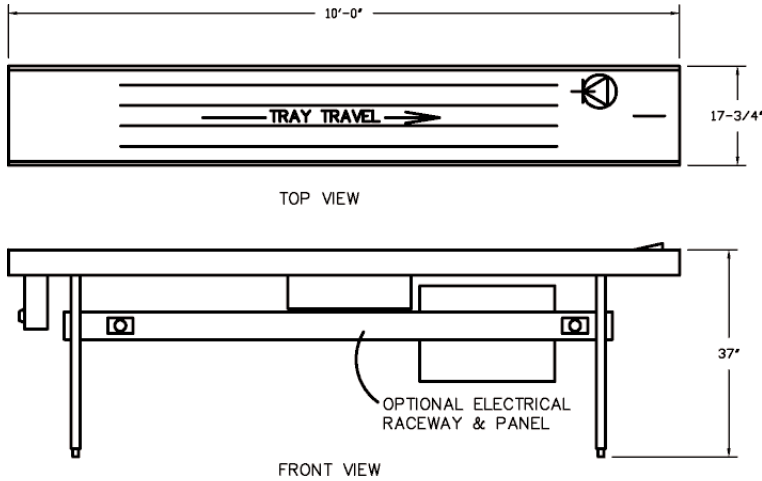

ELECTRICAL

Refer to bid specifications

TECHNICAL SPECIFICATIONS

Model	Dimensions			Shipping Weight (lbs.)
	W	L (overall)	H	
35-10-AF	17 ³ / ₄ "	10'	37"	600
35-12-AF	17 ³ / ₄ "	12'	37"	650
35-16-AF	17 ³ / ₄ "	16'	37"	725
35-18-AF	17 ³ / ₄ "	18'	37"	825
35-20-AF	17 ³ / ₄ "	20'	37"	900
35-22-AF	17 ³ / ₄ "	22'	37"	975
35-24-AF	17 ³ / ₄ "	24'	37"	1075
35-26-AF	17 ³ / ₄ "	26'	37"	1150
35-28-AF	17 ³ / ₄ "	28'	37"	1250
35-30-AF	17 ³ / ₄ "	30'	37"	1350

BID SPECIFICATIONS

Provide (1) model _____ Bandveyor™ tray conveyor. Overall dimensions shall be _____" wide x _____" long x _____" high. Top deck shall accommodate trays up to 17³/₄" wide and shall have continuous V type marine edge formed to cover exterior and interior sides of support channels. All seams shall be continuously welded and polished. A 20" loading and 28" unloading shelf shall be integral with top deck. Adjustable legs shall be 1⁵/₈" O.D. stainless steel with 1¹/₄" braces. Drive and control shall be 3/4 H.P. DC powered with integral worm. Speed control with variable speed adjustment up to 30 feet per minute. Conveyor bands shall be four (4) continuous bands of FDA approved material. Electrical shall be separate in a stainless steel drip-proof wire way with waterproof covers furnished on all outlets mounted in the raceway.

OPTIONAL ACCESSORIES

- Casters in lieu of legs
- 3-shelf starter station
- Circuit breaker panel and electrical raceway
- Optional correctional package available



Savannah, TN 38372 www.americanfoodserviceco.com
731-925-2200 / 800-447-4693 / FAX 731-925-2840

Due to continued product improvement, specifications are subject to change without notice.

2/01/11 USA