



## Combination Heater/ Proofing Cabinet, Non-Insulated

**Model**  
HP6A-LX-AF

### FEATURES

- **CONSTRUCTION**
  - Multi-purpose design provides heat for holding as well as heat and humidity for proofing. Also serves as a mobile heated transport cabinet.
  - 14 gauge aluminum body and 14 gauge galvanized caster base
  - Removable, dual purpose thermostatically controlled holding/proofing unit with external controls and 12 hour timer for proofing mode
  - Can be used with or without water
  - Condensation drip trough, removable for cleaning
  - Adjustable damper
  - Removable louvered back mounted air tunnel for even heat distribution
  - Five-inch swivel plate casters with modulus wheels (two with brakes)

### PRODUCT INFORMATION


- **DOOR**
  - 270° door swing
  - Hinged right
  - Field reversible
  - Positive latch handle
- **CLEARANCE**
  - Minimum of 4" clearance required on cabinet back and sides
- **THERMOSTAT RANGE**
  - Heating: 80° to 185°F (27° to 85°C)
  - Proofing: 80° to 135°F (27° to 57°C)
- **PANS**
  - Maximum ledge load: 30 lbs. per ledge
  - Standard ledge spacing: 3" or 4½"
  - Ledge spacing can also be adjusted to 3¾", 5¼", 6" and 6¾" without additional ledges
  - Optional ledge kit allows 1½" spacing
  - Pan/tray accommodations:
    - 18" x 26"
    - 18" x 13"
    - 12" x 20"

### WARRANTY

- Limited one year parts and labor

# Combination Heater/Proofing Cabinet, Non-Insulated

## HP6A-LX-AF

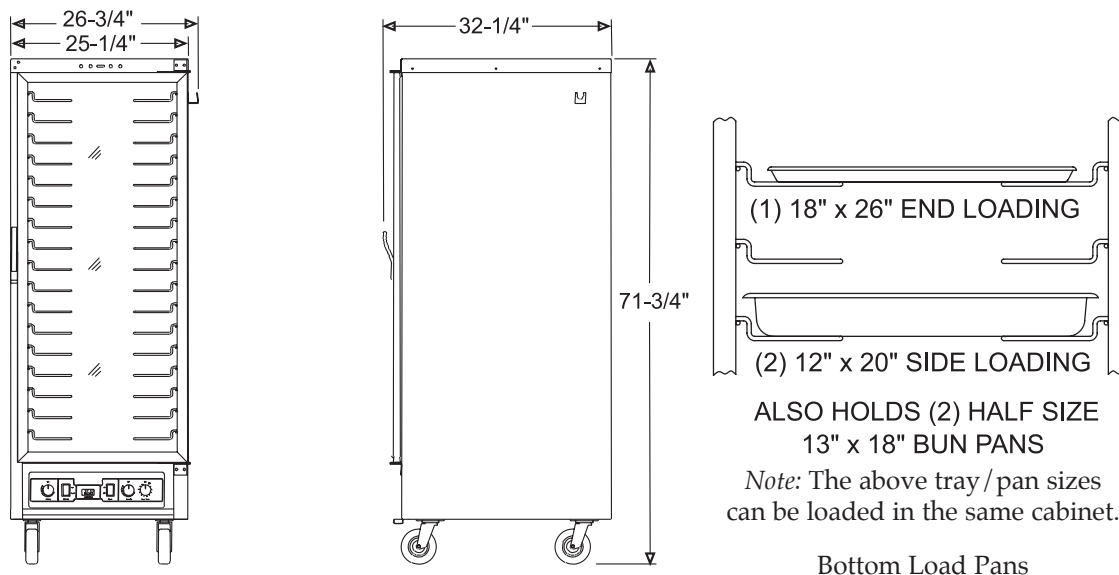

### ELECTRICAL

Via plug in, 9 foot long flexible three wire 12/3 SJO cord with molded plug.

(1) 18" x 26" END LOADING  
 (2) 12" x 20" SIDE LOADING  
 ALSO HOLDS (2) HALF SIZE  
 13" x 18" BUN PANS  
*Note: The above tray/pan sizes  
 can be loaded in the same cabinet.*

Bottom Load Pans

### TECHNICAL SPECIFICATIONS

Model	Dimensions (inches)			Volts	Heating Unit Watts	3" Ledge Spacing (Bottom Load) Pan Capacity		4-1/2" Ledge Spacing (Bottom Load) Pan Capacity		Max. Cabinet Static Load (Lbs./Kg)	Ship Cu. Ft.	Ship Wt. (Lbs./Kg)
	L	D	H			18 x 26 End Load	12 x 20 Side Load	18 x 26 End Load	12 x 20 Side Load			
HP6A-LX-AF	26 <sup>3</sup> / <sub>4</sub> "	32 <sup>3</sup> / <sub>4</sub> "	71 <sup>3</sup> / <sub>4</sub> "	115	1900	17	34	12	24	370/168	44	180/82

### BID SPECIFICATIONS

Provide ( ) HP6A-LX-AF Combination Heater/Proofing Cabinet, Non-Insulated.

Cabinet will have die-formed, corrosion resistant aluminum body and door with 14 gauge galvanized caster base. Cabinet will be provided with bottom mounted, removable, externally controlled, 1900 watt holding/proofing unit having main on/off switch, dual thermostats, digital thermometer, holding or proofing selector switch and 12 hour timer for proofing.

Cabinet will have field reversible door with positive latching handle and gasket, 270° door swing, adjustable damper, drip trough and louvered air tunnel for even heat distribution.

Cabinet will be provided with four 5-inch standard duty swivel plate casters having modulus wheels. Two casters will have brakes. Electrical hookup will be via a nine foot long flexible three wire 12/3 SJO cord with molded NEMA 5-20P, 115v plug.

Cabinet to have limited one year parts and labor warranty.

Optional 1/2" spaced ledge kit available.



Savannah, TN 38372 [www.americanfoodserviceco.com](http://www.americanfoodserviceco.com)  
 731-925-2200 / 800-447-4693 / FAX 731-925-2840