

Mobile Rack/Cart



Models

| <u>Aluminum</u> | <u>Stainless</u> |
|-----------------|------------------|
| PTRA1015-AF | PTRS1016-AF |
| PTRA1010-AF* | PTRS1011-AF |

*For 18 x 26 pans, stainless steel top,
standard duty $\frac{5}{16}$ " uniledge*

FEATURES

- **Application:** Well suited as a mobile work surface, slicer or mixer stand and for tray transport in a wide variety of standard duty applications.
- **Design & Construction:** One-piece, 14 gauge, high strength aluminum or 16 gauge stainless steel side panels with die formed $\frac{5}{16}$ " wide uniledges. Cross members are 14 gauge formed aluminum or 16 gauge stainless steel channel with 12 gauge stainless steel gussets and 12 gauge formed stainless steel top.
- **Optional correctional package available.**


PRODUCT INFORMATION

- **Design Features:** Uniledge side panels provide strength and easy cleaning. Cross members and gussets are riveted to create the high strength "I-Beam" assembly. Exclusive, "long angle" mounting bracket on casters assures rigidity. STO — Stainless steel top with outrigger channels on each side allows the attachment of (2) 18 x 26 or (4) 18 x 13 pans, creating an additional 6-½ sq. ft. mobile work surface.
- **Caster Type:** 5" dia., swivel, neoprene wheel with angle mounting bracket. (AL rack) standard duty; (SS rack) heavy duty
- **Ledge Load (Max.):** 15 lbs. per alum. ledge, 20 lbs. per stainless ledge
- **Spacing:** 1- $\frac{3}{8}$ " between ledges.
- **Pan Accommodations:** See tabulation.
- **Warranty:** One full year on parts and 90 days on labor from date of initial installation, covering defects in material or workmanship, excluding problems resulting from lack of normal maintenance, misuse and abuse.

*Supplied with (4) 12" vertical corner bumpers and (2) casters with brakes.

Mobile Rack/Cart

PTRA1015-AF, PTRA1010-AF, PTRS1016-AF, PTRS1011-AF

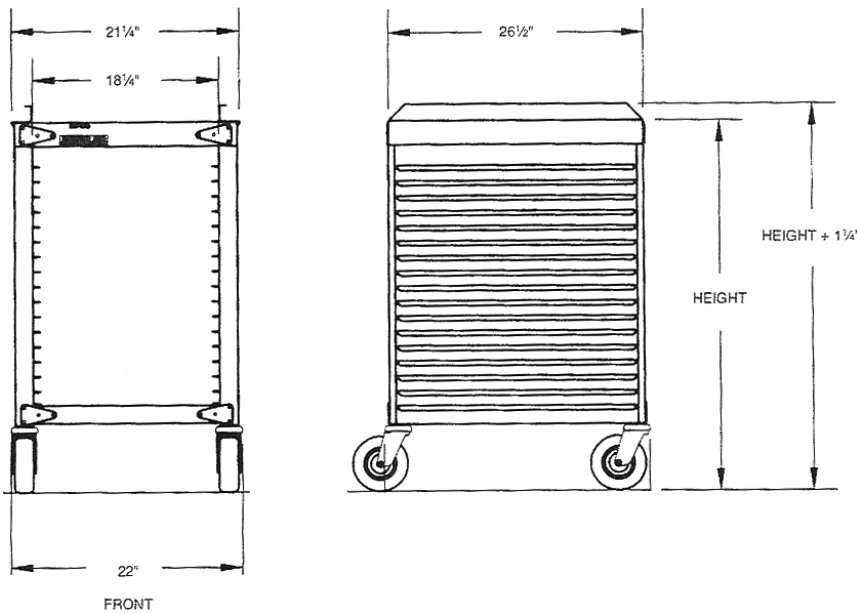

TECHNICAL SPECIFICATIONS

| Aluminum Model | Pan Capacity | | Spacing (in.) | Height (in.) | Max. Load (Lbs.) | Weights (lbs.) | | Shipping Dim. (in.) | | | Cu. ft. |
|-------------------|--------------|-----------|-------------------------------|--------------------------------|---------------------|----------------|------|---------------------|-------|--------|------------|
| | 18" x 26" | 18" x 13" | | | | Net | Ship | Width | Depth | Height | |
| PTRA1015-AF | 17 | 34 | 1 ³ / ₈ | 36 ¹ / ₂ | 255 | 54 | 60 | 26 | 34 | 37 | 19 |
| *PTRA1010-AF | 12 | 24 | 1 ³ / ₈ | 30 | 180 | 51 | 57 | 26 | 34 | 37 | 19 |

*Equipped with (4) 12" vertical corner bumpers and (2) casters with brakes.

| Stainless Model | Pan Capacity | | Spacing (in.) | Height (in.) | Max. Load (Lbs.) | Weights (lbs.) | | Shipping Dim. (in.) | | | Cu. ft. |
|--------------------|--------------|-----------|-------------------------------|--------------------------------|---------------------|----------------|------|---------------------|-------|--------|------------|
| | 18" x 26" | 18" x 13" | | | | Net | Ship | Width | Depth | Height | |
| PTRS1016-AF | 17 | 34 | 1 ³ / ₈ | 36 ¹ / ₂ | 340 | 69 | 75 | 26 | 34 | 37 | 19 |
| PTRS1011-AF | 12 | 24 | 1 ³ / ₈ | 30 | 240 | 66 | 72 | 26 | 34 | 37 | 19 |

BID SPECIFICATIONS

Provide (1) model _____ Mobile Rack/Cart.

Construction shall be (1) piece, die formed, corrosion resistant coated aluminum uniledge side panels with integral ¹/₈" wide ledges spaced 1-³/₈" apart with riveted top and bottom I-beam cross braces and stainless steel top with outrigger channels.

Provide with (4) 5" swivel casters, (2) locking, having neoprene wheels and vertical angle mounting brackets.

Must be NSF approved.



Savannah, TN 38372 www.americanfoodserviceco.com
731-925-2200 / 800-447-4693 / FAX 731-925-2840

Due to continued product improvement, specifications are subject to change without notice.

2/01/11 USA