



## UNITRON™ 5 Retherm Cart

### Model

- |                                     |                                     |
|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> CRC5-10-AF | <input type="checkbox"/> CRC5-24-AF |
| <input type="checkbox"/> CRC5-16-AF | <input type="checkbox"/> CRC5-26-AF |
| <input type="checkbox"/> CRC5-20-AF |                                     |

The UNITRON™ 5 Convected Air Retherm Cart is designed to accommodate 10, 16, 20, 24 and 26 trays and to interface with the UNITRON™ 5 Rethermalization Module. The cart transports the chilled meals to the rethermalization area, acts as the rethermalization vehicle, the meal delivery vehicle, and the soiled tray retrieval vehicle.

### FEATURES


- Can be used as both delivery and retrieval tray cart.
- Foam construction adds to durability as well as providing insulation.
- Push/pull handles on two sides.
- Stainless doors open 270° fully back against cart sides.
- Color coded for correct tray loading.
- Easy to move and to dock.
- No electronics for easy cleaning.

### PRODUCT INFORMATION

- **Construction:** Sides shall be twenty (20) gauge stainless steel, all welded construction. Doors shall be twenty (20) gauge stainless steel, all welded construction. Insulation in both cart sides and cart doors shall be polyurethane, foamed-in-place with 97% closed cell content. Stainless steel tray guide assemblies shall be removable without tools for cleaning. Front door to include a menu card holder. Cart shall be UL listed as cart washable.
- **Platform Base:** Shall be reinforced fourteen (14) gauge stainless steel, all welded construction with twelve (12) gauge caster channels. Support plates to be heavy-duty stainless steel with center floor support ribs. Full perimeter, long life, nylon bumper affixed to base.
- **Casters:** Shall be six inch (6") diameter with stainless steel roller bearing wheels, and ball bearing swivels. Wheels shall be non-marking polyurethane. Four swivel caster arrangement: two (2) shall be swivel and two (2) shall be swivel locking.
- **Tray Divider:** Cart shall incorporate a polyurethane foamed-in-place plastic divider which separates the hot compartment from the cold compartment. The material used to manufacture the divider shall be a high temperature thermoplastic.

# UNITRON™ 5 Retherm Cart

**CRC5-10-AF, CRC5-16-AF, CRC5-20-AF, CRC5-24-AF, CRC5-26-AF**

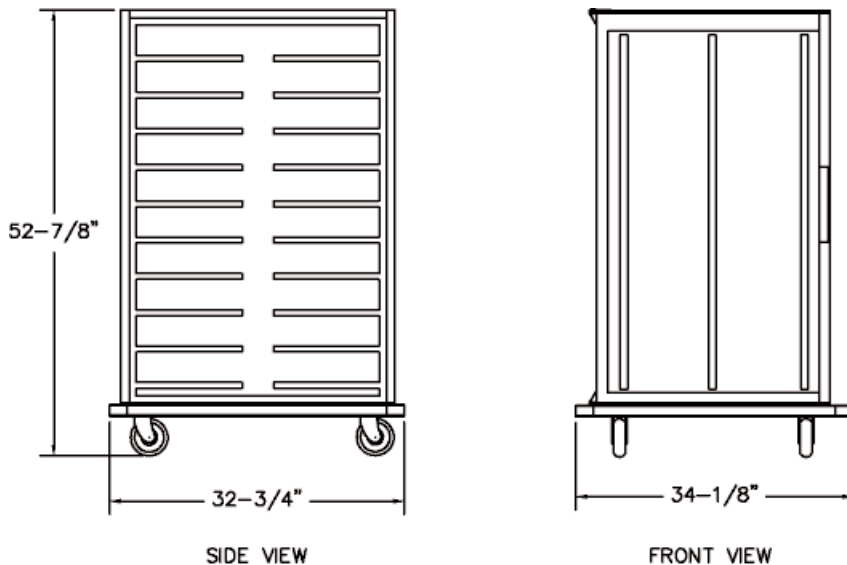

## TECHNICAL SPECIFICATIONS

Model	Dimensions			Shipping Weight	Spacing
	W	D	H		
CRC5-10	34 <sup>1</sup> / <sub>8</sub> "	24 <sup>5</sup> / <sub>8</sub> "	52 <sup>7</sup> / <sub>8</sub> "	325 lbs.	4"
CRC5-16	34 <sup>1</sup> / <sub>8</sub> "	32 <sup>3</sup> / <sub>4</sub> "	44 <sup>7</sup> / <sub>8</sub> "	370 lbs.	4"
CRC5-20	34 <sup>1</sup> / <sub>8</sub> "	32 <sup>3</sup> / <sub>4</sub> "	52 <sup>7</sup> / <sub>8</sub> "	430 lbs.	4"
CRC5-24	34 <sup>1</sup> / <sub>8</sub> "	32 <sup>3</sup> / <sub>4</sub> "	60 <sup>7</sup> / <sub>8</sub> "	435 lbs.	4"
CRC5-26	34 <sup>1</sup> / <sub>8</sub> "	32 <sup>3</sup> / <sub>4</sub> "	60 <sup>7</sup> / <sub>8</sub> "	435 lbs.	3 <sup>11</sup> / <sub>16</sub> "

Note: Requires UNITRON™ 5 Tray (13" x 21"), wt. 1.83 lbs. each.

## BID SPECIFICATIONS

Provide (1) model \_\_\_\_\_ UNITRON™ 5 Retherm Cart.

The UNITRON 5 Convection Retherm Cart is designed to accommodate UNITRON trays sized 13" x 21". The Cart interfaces with the UNITRON 5 Rethermalization Module which supplies both heat and refrigeration. The Cart transports fully assembled trays of chilled foods to the Retherm Module, acts as the Retherm vehicle, the delivery and retrieval Cart. Fabricated from S/S with welded construction, the Cart is equipped with doors, front and back. Doors and cart sides are fully insulated with foamed-in-place polyurethane. S/S tray assembly guides are removable for cleaning, and the Cart is UL Listed as cart-washable. The Cart incorporates patented temperature zone barriers matching tray guides. Swivel casters and S/S, ball bearing, 6" dia. with polyurethane tires. Two casters are furnished with swivel locks.



Savannah, TN 38372 [www.americanfoodserviceco.com](http://www.americanfoodserviceco.com)  
731-925-2200 / 800-447-4693 / FAX 731-925-2840

Due to continued product improvement, specifications are subject to change without notice.

9/01/11 USA